

Flexible & self-adhesive silicium carbide polishing film


De Houtbewaarder
Hewn & Hone



Pieterjan Heyse – de@houtbewaarder.be – 0496755987
<https://houtbewaarder.be/winkel/>

Instructions

- The film is self-adhesive but will leave adhesive residue on the dowels. Therefore, use the PTFE dowels. These allow you to remove the adhesive residue with a soft cloth.
- Apply the film slightly at an angle to the dowel and do this just before use. This ensures good adhesion.

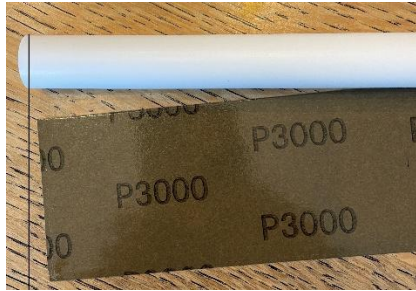

- When applying the polishing film, make sure the surface is free of sand and dust using a soft lint-free cloth.
- Remove the white backing from the polishing film and place it abrasive-side down on the table. Start rolling close to the edge of the dowel to maximize the size of the handle. Then roll the dowel over the film and press firmly.
- Always grind away from the cutting edge. The film will be damaged quickly if you grind into the cutting edge.
- Stopping can be replaced by polishing with grit 7000.
- The silicon carbide backing is not very water-resistant. You can only rinse the polishing film a few times. Replace the polishing film when it is worn or starts to fall apart.
- Via the QR codes below you can subscribe to my newsletter with updates about De Houtbewaarder, or join the WhatsApp community where you can ask specific questions about the pole lathe or sharpening.



Whatsapp community

nieuwsbrief via e-mail



Good luck with sharpening and enjoy sharp tools!